

# LINK-LIGHT

## 5 Watt LED light strip

### GLL22




Easy to assemble LED light strips that simply lock together, end-to-end. Each 30cm white strip offers twice the brightness of a 20W halogen, while using less than 5W of power. The LED strip inside the link-light has adjustable tilt so the light can be directed to where it is required. Supplied with slide-on mounting clips for easy fixing. The complete LED solution for shelf and cabinet lighting, corridor illumination and point-of-sale lighting.

Please note, does not include end-cap and connecting lead set. Please order separately using code GLF22-EC


Guarantee : 2 years

Non-dimmable



Specifications				
Product Code	GLL22LLW24V	GLL22LLD24V	GLL22LLSW24V	GLL22LLSD24V
Colour	Warm White	Cool White	Spectralux Warm White	Spectralux Daylight white
Power Consumption	4.5W	4.5W	5.3W	4.8W
Operational Voltage	24 V DC <small>(pls use Greenled driver)</small>	24 V DC <small>(pls use Greenled driver)</small>	24 V DC <small>(pls use Greenled driver)</small>	24 V DC <small>(pls use Greenled driver)</small>
Colour Temperature	2800 K	6500 K	2800 K	6500 K
Rendering Index	Ra=67	Ra=75	Ra=90	Ra=90
Intensity of Light Output	260 Lm	250 Lm	200 Lm	220 Lm
Lumens per watt	58 Lm/W	56 Lm/W	38 Lm/W	45 Lm/W
Expected Life	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs

### Dimensions

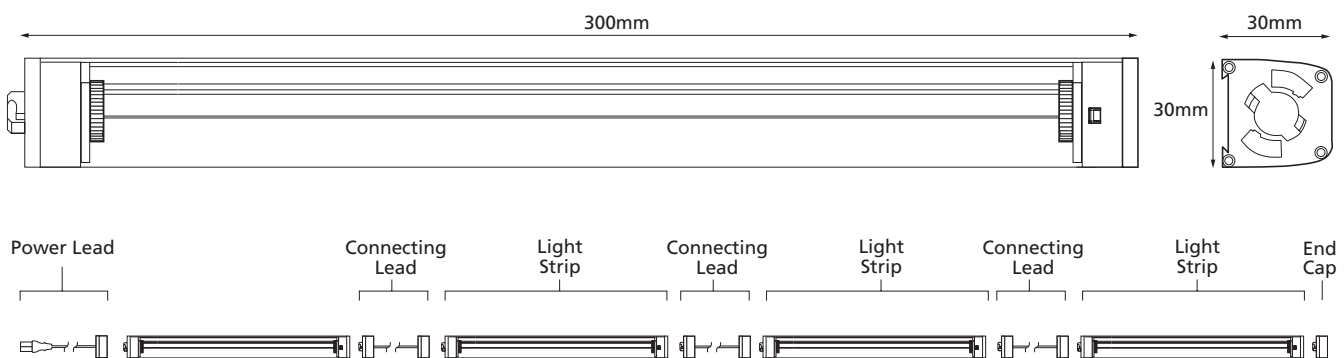

NB: Maximum number of Strips connected together is 10

Not to Scale



Specifications subject to change without notice

Greenled is BS 8555 Certified